




MJ N-Channel Super Trench II Power MOSFET

Description

The series of devices uses Super Trench II technology that is uniquely optimized to provide the most efficient high frequency switching performance. Both conduction and switching power losses are minimized due to an extremely low combination of $R_{DS(ON)}$ and Q_g . This device is ideal for high-frequency switching and synchronous rectification.

General Features


- ♦ V_{DS}=30V,I_D=85A R_{DS(ON)}=2.3mΩ (typical) @ V_{GS}=10V R_{DS(ON)}=3.8mΩ (typical) @ V_{GS}=4.5V
- ◆ Excellent gate charge x R_{DS(on)} product(FOM)
- ◆ Very low on-resistance R_{DS(on)}
- ◆ 150°C operating temperature
- ◆ Pb-free lead plating



Schematic Diagram

Application

- ◆ DC/DC Converter
- ◆ Ideal for high-frequency switching and synchronous rectification



DFN 5X6

100% UIS TESTED! 100% ΔVds TESTED!

Package Marking and Ordering Information

Device Marking	Device	Device Package	Reel Size	Tape width	Quantity
P025N30G	MJXP025N30G	DFN5X6-8L	2	<u>=</u>	2

Absolute Maximum Ratings (Tc=25℃ unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	VDS	30	V
Gate-Source Voltage	Vgs	±20	V
Drain Current-Continuous	lo	85	А
Drain Current-Continuous(Tc =100°C)	I D(100℃)	66	А
Pulsed Drain Current	Ірм	340	А
Maximum Power Dissipation	Po	65	W
Derating factor		0.56	W/°C
Single pulse avalanche energy (Note 5)	Eas	352	mJ
Operating Junction and Storage Temperature Range	Тл,Тѕтс	-55 To 150	°C

Thermal Characteristic

Thermal Resistance, Junction-to-Case (Note 2) Rejc 1.92 °C
--





Electrical Characteristics (Tc=25℃ unless otherwise noted)


Parameter	Symbol	Condition	Min	Тур	Max	Unit
Off Characteristics						
Drain-Source Breakdown Voltage	BVDSS	V _{GS} =0V I _D =250µA	30	_	-	V
Zero Gate Voltage Drain Current	loss	Vps=30V,Vgs=0V	-	-	1	μΑ
Gate-Body Leakage Current	lgss	V _{DS} =±20V,V _{DS} =0V	_	-	±100	nA
On Characteristics (Note 3)						
Gate Threshold Voltage	VGS(th)	V _{DS} =V _{GS} ,I _D =250µA	1.0	1.6	2.0	V
Davie Course On Otata Pariatana	_	V _{GS} =10V,I _D =40A	-	2.3	2.5	mΩ
Drain-Source On-State Resistance	RDS(ON)	V _{GS} =4.5V,I _D =40A	-	3.8	4.5	mΩ
Forward Transconductance	grs	V _{DS} =5V,I _D =40A	-	65	-	S
Dynamic Characteristics (Note 4)	1		1			
Input Capacitance	Clss	Vps=15V,Vcs=0V F=1.0MHz	-	2400	-	PF
Output Capacitance	Coss		-	1700	-	PF
Reverse Transfer Capacitance	Crss		-	120	-	PF
Switching Characteristics (Note 4)	-		1			
Turn-on Delay Time	t _{d(on)}		-	5.0	-	nS
Turn-on Rise Time	tr	VDD=15V,ID=40A	_	7.0	-	nS
Turn-Off Delay Time	t _{d(off)}	V _{DD} =15V,ID=40A V _{GS} =10V,R _G =1.6Ω	_	27.0	_	nS
Turn-Off Fall Time	tr		-	5.0	-	nS
Total Gate Charge	Qg		_	40.5	_	nC
Gate-Source Charge	Qgs	V _{DS} =15V,I _D =40A V _{GS} =10V	_	6.5	_	nC
Gate-Drain Charge	Qgd	V G5-10 V	_	7.0	_	nC
Drain-Source Diode Characteristics				<u> </u>		
Diode Forward Voltage (Note 3)	Vsp	V _{GS} =0V,I _S =40A	_	_	1.2	V
Diode Forward Current (Note 2)	Is		_	_	85	Α
Reverse Recovery Time	trr		_	14	_	nS
Reverse Recovery Charge	Qrr	TJ=25°C,IF= Is di/dt= 100A/µs (Note 3)	_	21	_	nC
Travelse recovery onlinge	Qrr					110

Notes:

- 1) Repetitive Rating: Pulse width limited by maximum junction temperature.
- Surface Mounted on FR4 Board, t ≤ 10 sec.
- ③ Pulse Test: Pulse Width ≤ 300µs, Duty Cycle ≤ 2%.
- (4) Guaranteed by design, not subject to production
- $\ensuremath{\texttt{(5)}}$ EAS condition : Tj=25°C,VDD=15V,VG=10V,L=0.5mH,Rg=25 Ω



Typical Electrical and Thermal Characteristics

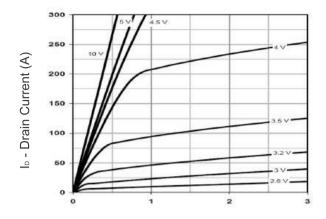

Vds Drain-Source Voltage (V)
Figure 1 Output Characteristics

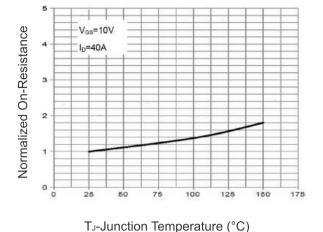


Figure 4 Rdson-Junction Temperature


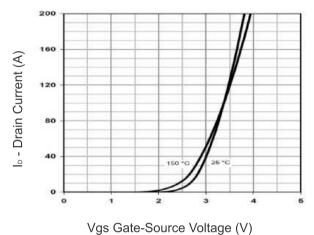


Figure 2 Transfer Characteristics

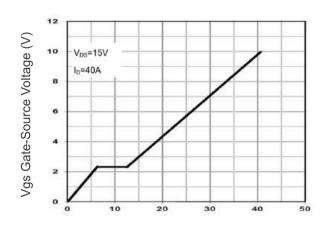

Qg Gate Charge (nC)
Figure 5 Gate Charge



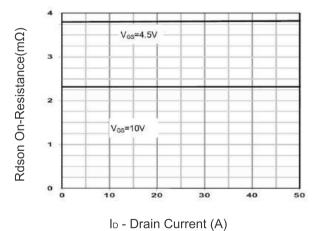


Figure 3 Rdson- Drain Current




Vsd Source-Drain Voltage (V)
Figure 6 Source- Drain Diode Forward

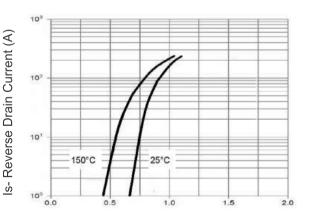

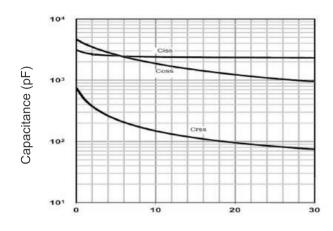


Vds Drain-Source Voltage (V)

Figure 7 Capacitance vs Vds

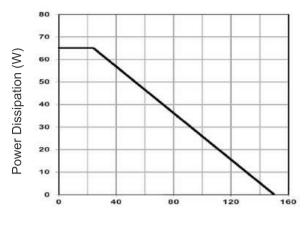


T_J-Junction Temperature (°C)

Figure 9 Power De-rating

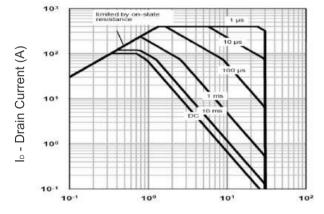


Vds Drain-Source Voltage (V)

Figure 8 Safe Operation Area

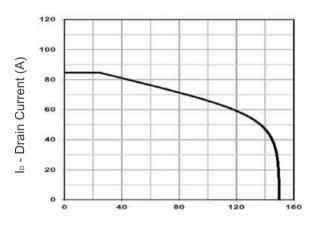

T_J-Junction Temperature (°C)

Figure 10 Current De-rating

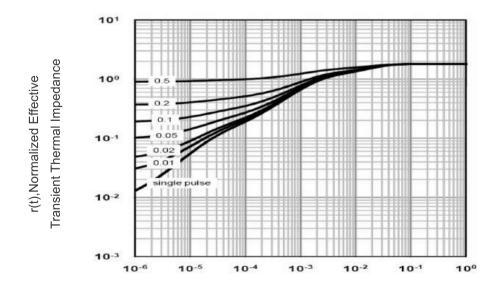


Square Wave Pluse Duration(sec)

Figure 11 Normalized Maximum Transient Thermal Impedance






DFN5X6-8L Package Information

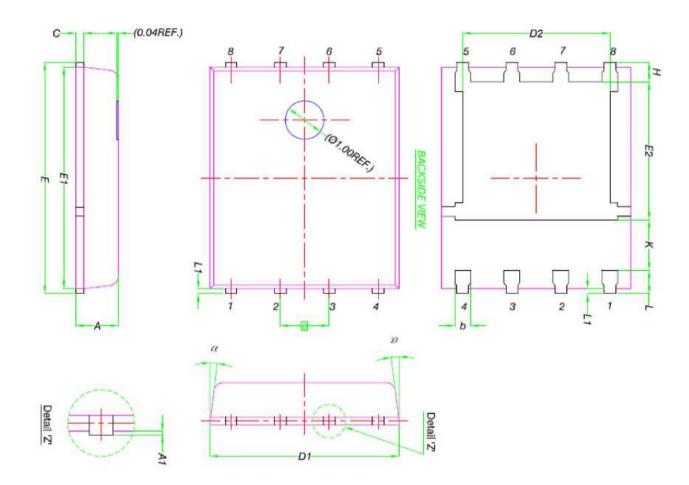

DIM.	MILLIMETERS			
	MIN.	NOM.	MAX.	
Α	0.90	1.00	1.10	
A1	0		0.05	
b	0.33	0.41	0.51	
С	0.20	0.25	0.30	
D1	4.80	4.90	5.00	
D2	3.61	3.81	3.96	
Ε	5.90	6.00	6.10	
E1	5.70	5.75	5.80	
E2	3.38	3.58	3.78	
е	1.27 BSC			
Н	0.41	0.51	0.61	
K	1.10		*	
L	0.51	0.61	0.71	
L1	0.06	0.13	0.20	
α	O°	-	129	

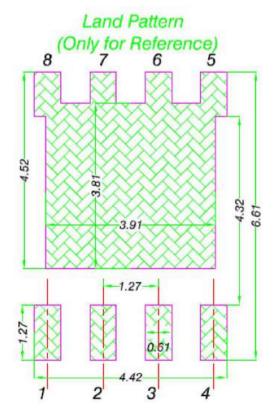





Attention:

Any and all MJ power products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your MJ power representative nearest you before using any MJ power products described or contained herein in such applications.

MJ power assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all MJ power products described or contained herein.

Specifications of any and all MJ power products described or contained herein stipulate the erformance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

MJ power Semiconductor CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.

In the event that any or all MJ power products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.

No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or therwise, without the prior written permission of MJ power Semiconductor CO.,LTD.

Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. MJ power believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the MJ power product that you intend to use.

This catalog provides information as of Sep.2010. Specifications and information herein are subject to change without notice.